

Features:

Sashless panes of glass move within their own plane

Provides high and low ventilation

Fits most aluminium frame profiles

Can be retrofitted to solve ventilation problems

Removable midseal closes off winter draughts Lock open position provides secure ventilation

Available with or without a Base Pane


Specifications:

Frame height from 1500mm

Frame width from 1000mm

Annealed, laminated, toughened or Low E glass available as standard

 $\label{thm:most_powder} \mbox{Most powder coated and anodised aluminium finishes available as standard}$





Infill 08261

Angle 01234

Adaptor 30056

Guide N1388



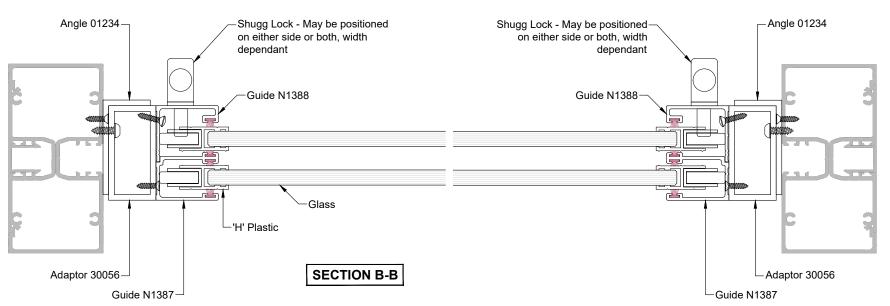

Neotechnical Industries Ltd					
9 McDonald St, Sandringham,					
Auckland.					
Phone: 09 815 0481					
Email: info@shugg.co.nz					
www.shugg.co.nz					

Guide N1387

Frame Type	APL 100mm Shop front	Drawing name	DH102-CA5	Scale	1:2
Section	A:A & B:B	Date drawn	14-09-21	Revision	001
Notes	-	Window style	Double Hung		
Notes	-	Window format	Commercial		
Notes	-	Glazing	Single	Thickness	8mm