

## Vertical sliding double hung window Residential 2 pane

### Features:

Sashless panes of glass move within their own plane

Provides high and low ventilation

Narrow aluminium profiles

Fits most aluminium frame profiles

Can be retrofitted to solve ventilation problems

Removable midseal closes off winter draughts

Acrylic lifting handle may be positioned at the bottom or top of the bottom sliding pane (shown at top)

Lock open position provides secure ventilation

Available with or without a Base Pane

### Specifications:



Curved and/or raking heads available

Frame height from 600mm

Frame width from 370mm

Annealed, laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard

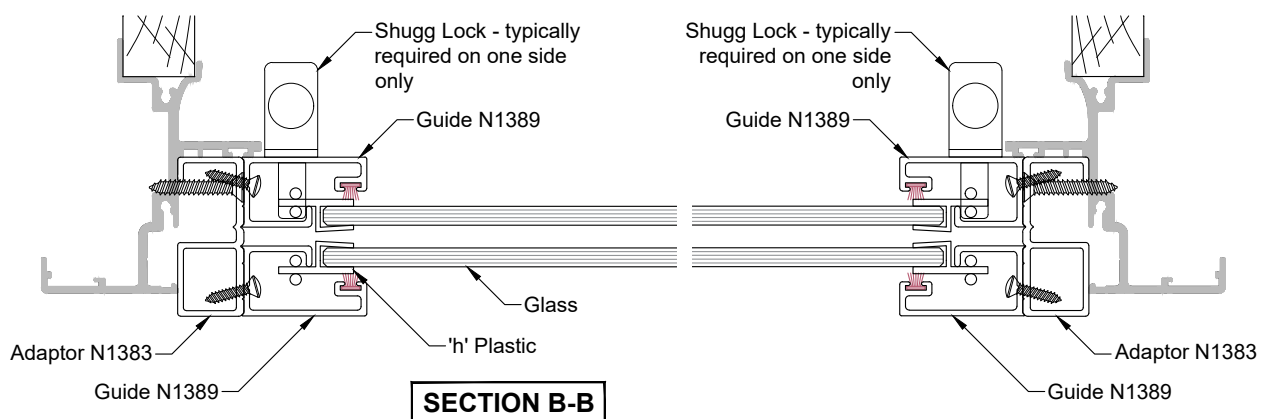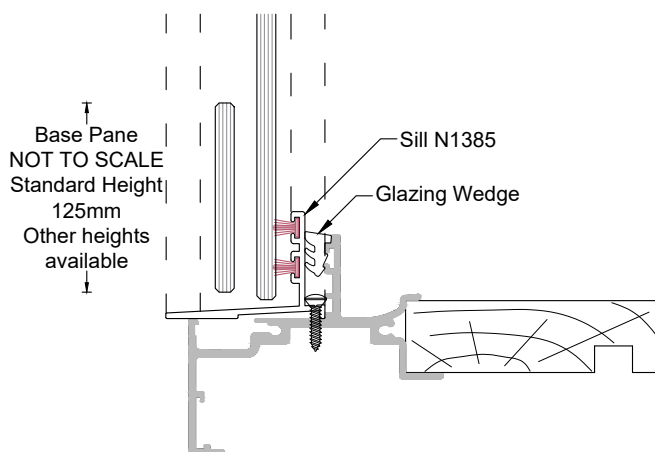

Neotechnical Industries Ltd

9 McDonald St, Sandringham,  
Auckland.

Phone: 09 815 0481

Email: [info@shugg.co.nz](mailto:info@shugg.co.nz)

[www.shugg.co.nz](http://www.shugg.co.nz)

Frame Type	APL Metro	Drawing name	DH102 RA1	Scale	1:2
Section	A:A & B:B	Date drawn	11-08-21	Revision	001
Notes	-	Window style	Double Hung		
Notes	-	Window format	Residential		
Notes	-	Glazing	Single	Thickness	5mm

Details subject to change without notice. Exterior frames by others, Neotechnical Industries Ltd does not own the rights to exterior frames shown and are indicative only. All other details © Neotechnical Industries Ltd, not to be reproduced, altered or distributed in any form without permission.