

Vertical sliding double hung window Residential 2 pane

Features:

Sashless panes of glass move within their own plane

Provides high and low ventilation

Narrow aluminium profiles

Fits most aluminium frame profiles

Can be retrofitted to solve ventilation problems

Removable midseal closes off winter draughts

Acrylic lifting handle may be positioned at the bottom or top of the bottom sliding pane (shown at top)

Lock open position provides secure ventilation

Available with or without a Base Pane

Specifications:


Curved and/or raking heads available


Frame height from 600mm

Frame width from 370mm

Annealed, laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard



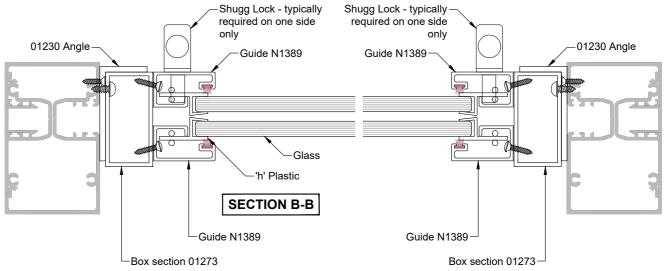

Neotechnical industries Ltd
9 McDonald St, Sandringham, Auckland.
Phone: 09 815 0481
Email: info@shugg.co.nz
www.shugg.co.nz

Frame Type	APL 80mm Shop front	Drawing name	DH101 RA14 Scale	1:2
Section	A:A & B:B	Date drawn	11-08-21 Revision	001
Notes	-	Window style	Double Hung	
Notes	-	Window format	Residential	
Notes	-	Glazing	Single Thickness	8mm