

Midseal

Typically 100mm

Wool Pile Carrier

OVERLAP NOT TO SCALE

**SECTION A-A** 

## Vertical sliding double hung window Residential 2 pane

## Features:

Sashless panes of glass move within their own plane

Provides high and low ventilation

Narrow aluminium profiles

Can be retrofitted to solve ventilation problems (frames may need to be adapted to suit)

Removable midseal closes off winter draughts

Lock open position provides secure ventilation

Acrylic lifting handle may be positioned at the bottom or top of the bottom sliding pane (shown at top)

Available with or without a Base Pane


## Specifications:

Curved and/or raking heads available

Frame height from 600mm

Frame width from 370mm

Annealed, laminated, toughened or Low E glass available as standard Most powder coated and anodised aluminium finishes available as standard

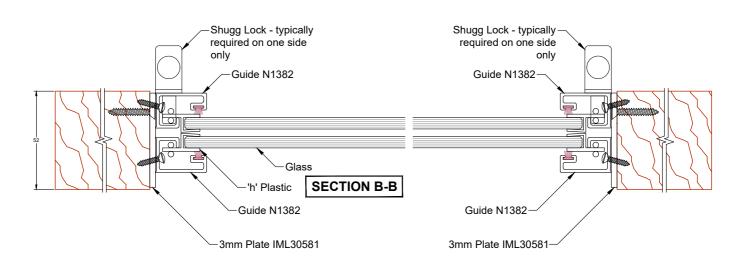

## Neotechnical Industries Ltd

9 McDonald St, Sandringham, Auckland. Phone: 09 815 0481 Email: info@shugg.co.nz www.shugg.co.nz

Frame Type	Timber hinged door	Drawing name	DH102 RT5 Scale	1:2
Section	A:A & B:B	Date drawn	11-08-21 Revision	001
Notes	-	Window style	Double Hung	
Notes	-	Window format	Residential	
Notes	-	Glazing	Single Thickness	6mm