

Vertical sliding single hung window Commercial 2 pane bottom fixed

Features:

Sashless pane of glass moves within it's own plane

Bottom fixed, top sliding pane

Bottom pane fixed to prevent egress to outside areas

Fits most aluminium frame profiles

Can be used as a barrier (conditions apply)

Can be retrofitted

Removable midseal closes off winter draughts

Lock open position provides secure ventilation

Opening wand available when lift may be out of reach


Specifications:


Frame height from 1500mm

Frame width from 1150mm

Laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard



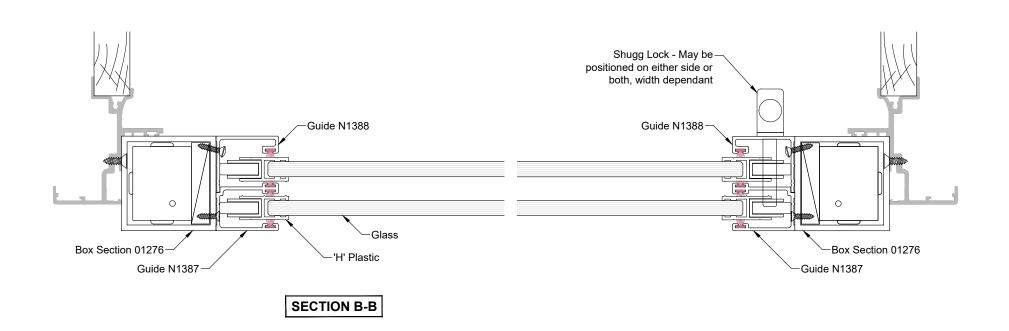

Neotechnical Industries Ltd					
9 McDonald St, Sandringham,					
Auckland.					
Phone: 09 815 0481					
Email: info@shugg.co.nz					
www.shugg.co.nz					

Frame Type	APL Metro Awning	Drawing name	SH101-CA1	Scale	1:2	
Section	A:A & B:B	Date drawn	14-09-21	Revision	001	
Notes	-	Window style	Single Hung			
Notes	-	Window format	Commercial			
Notes	_	Glazing	Single	Thickness	8mm	