



Typically 100mm

OVERLAP NOT TO SCALE

SECTION A-A

Bottom fixed, top sliding pane

Aluminium profiles hidden within timber covers

Can be used as a barrier (conditions apply)


Can be retrofitted

(frames may need to be adapted to suit)

Removable midseal closes off winter draughts

Lock open position provides secure ventilation

Opening wand available when lift may be out of reach

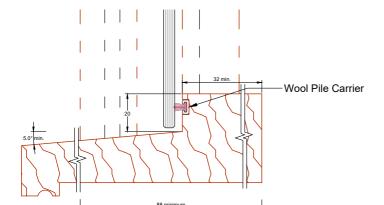

Specifications:


Curved and/or raking heads available

Frame height from 600mm

Frame width from 400mm

Annealed, laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard

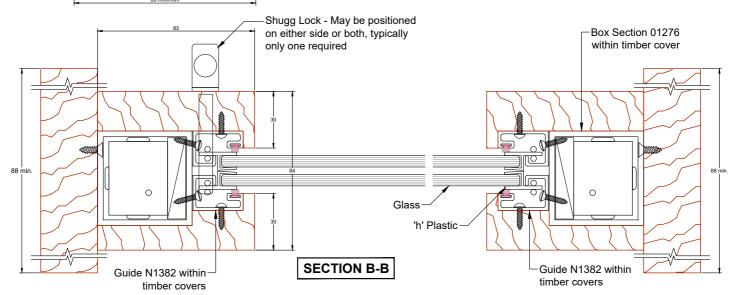

Neotechnical Industries Ltd
9 McDonald St, Sandringham, Auckland
,
Phone: 09 815 0481
Email: info@shugg.co.nz
www.shugg.co.nz

Frame Type	Timber frame for Shugg	Drawing name	SH101 TFC7 ^{Scale}	1:2
Section	A:A & B:B	Date drawn	11-08-21 Revision	001
Notes	-	Window style	Single Hung	
Notes	-	Window format	Residential	
Notes	-	Glazing	Single Thickness	6mm