

## Vertical sliding single hung window Residential cavity slider

### Features:

Sashless pane of glass moves within it's own plane

Sliding pane moves upwards into wall or ceiling cavity

Ideal for reception areas or serveries

Neotec recommends a removable access panel for future maintenance should it be required.

Lock open position provides secure pass through

### Specifications:

Curved and/or raking heads available


Frame height from 600mm

Frame width from 400mm

Annealed, laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard

### SECTION A-A

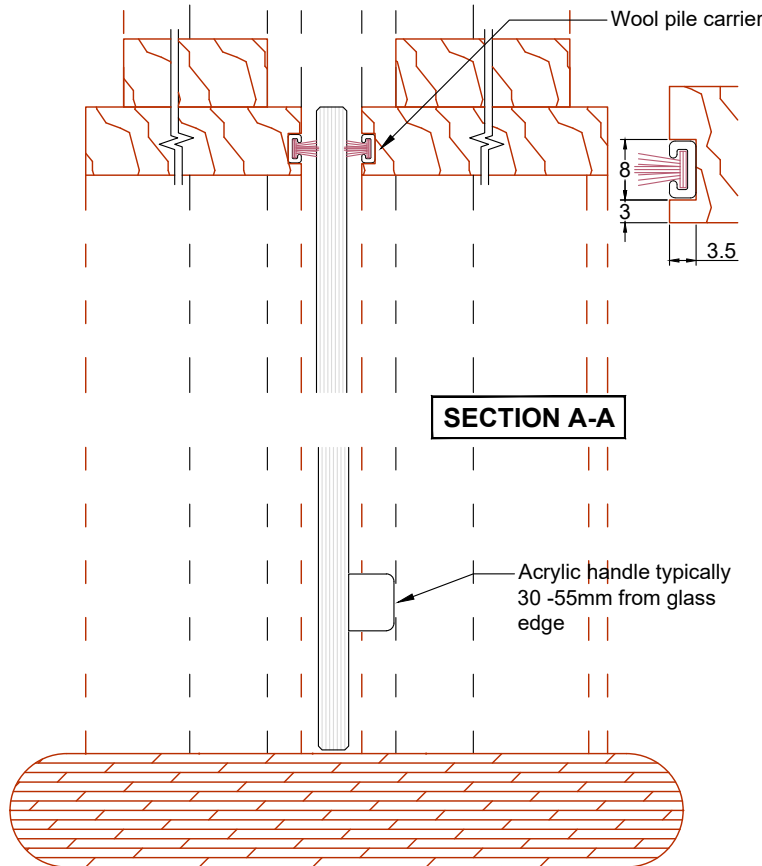

Shugg Lock - May be positioned on either side or both, typically only one required


Guide N1388 (ripped)

'H' Plastic  
Glass

Guide N1388 (ripped)

### SECTION B-B

Box Section 30881

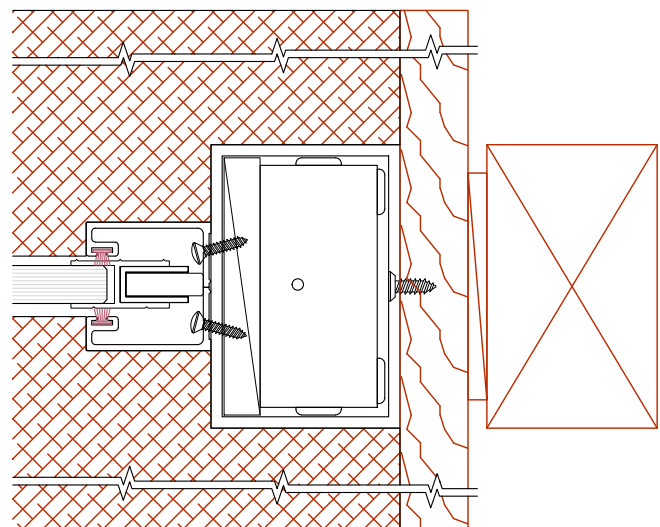

Neotechnical Industries Ltd

9 McDonald St, Sandringham,  
Auckland.

Phone: 09 815 0481

Email: info@shugg.co.nz

www.shugg.co.nz

Frame Type

Timber

Section

A:A & B:B

Notes

-

Notes

-

Notes

-

Drawing name

SH105 CTC2

Scale

1:2

Date drawn

11-08-21

Revision

001

Window style

Single Hung

Window format

Commercial

Glazing

Single

Thickness

10mm

Details subject to change without notice. Exterior frames by others, Neotechnical Industries Ltd does not own the rights to exterior frames shown and are indicative only. All other details © Neotechnical Industries Ltd, not to be reproduced, altered or distributed in any form without permission.