

Vertical sliding single hung window Residential cavity slider

Features:

Sashless pane of glass moves within it's own plane

Sliding pane moves upwards into wall or ceiling cavity

Ideal for reception areas or serveries

Neotec recommends a removable access panel for future maintenance should it be required.

Lock open position provides secure pass through

Specifications:

Curved and/or raking heads available

Drawing name

Date drawn

Glazing

Window style

Window format

Frame height from 600mm

Frame width from 400mm

Annealed, laminated, toughened or Low E glass available as standard

Most powder coated and anodised aluminium finishes available as standard

SH105_RTC1^{Scale}

11-08-21

Single Hung


Residential

1:2

001

Revision

Thickness

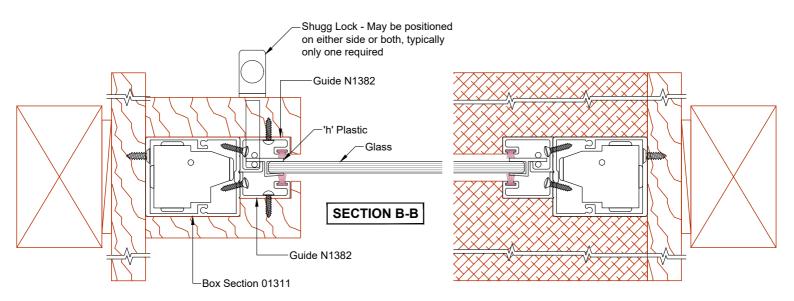

Frame Type Timber Neotechnical Industries Ltd Section A:A & B:B 9 McDonald St, Sandringham, Auckland. Notes Phone: 09 815 0481 Notes Email: info@shugg.co.nz www.shugg.co.nz Notes

ww.snugg.co.nz	Notes	_	Glazing	Single	Thickness	6mm
Details subject to change without notice. Exterior frames by others, Neotechnical Industries Ltd does not own the rights to exterior frames shown and are indicative only. All other details						
	© Neotechnical II	ndustries Ltd, not to be reproduced, altered or distrib	uted in any form withou	t permission.		